

NEW

TRADE\$AVE

50W LED Floodlight




Features

- Aluminium housing powder coated black
- Tempered glass lens & polycarbonate cover
- Slim body design
- Constant current driver
- Surge protected 6kV Line-Line, 10kV Line-Earth
- High efficiency SMD chip 145Lm/w
- Operating temp: -30°C to +50°C
- IP66 rated at IK08 impact resistance

Includes

- Prewired 1.5m 3 core cable

CERTIFICATION	IP RATING	DALI DIMMABLE
PROTECTION	IK RATING	BOX CTN QTY
	 1.7kg @ 300mm	1 1

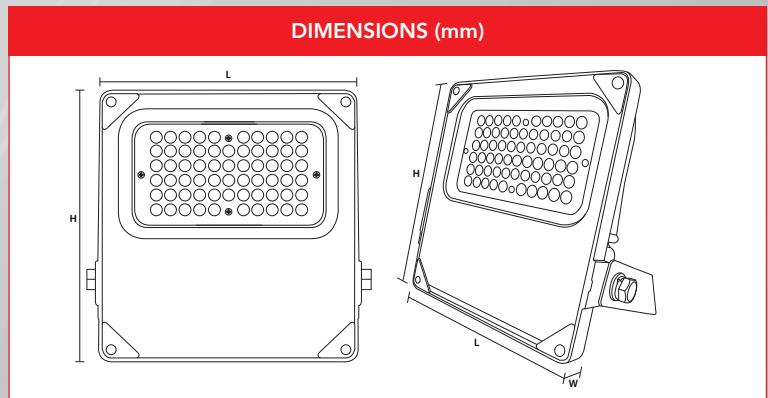

Part No.	Voltage AC	Watt	PF	CCT	Ra	Lumens	Beam Angle	Lifetime hrs	Fitting Colour	Dimensions (L x W x H)mm	Weight
TSFL50W	200-240V	50W	0.95	5000K	70	7,250	120	63,000	Black	228 x 55 x 276	1.8kg

Part No.	Description
TSFL50W	LED 50W Flood Light 5000K Non-Dimmable IP66 7,250 Lumens

1300 555 586
 repelec.com.au



@RepelecAU